


Datasheet 2Y2YCY

Version 1/2009

IMB-Twinax Cable

Application:

It is to be applied indoors as a BUS-installation cable in the data transmission engineering.

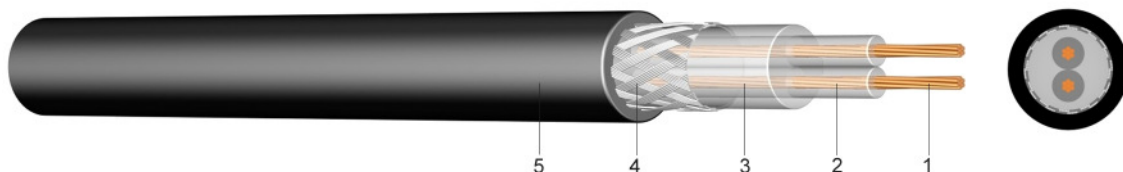

Construction:

- 1 fine-stranded bare copper
- 2 core insulation of polyethylene (PE)
- 3 inner sheath of polyethylene (PE)
- 4 screen of tinned copper braiding
- 5 outer sheath of polyvinylchloride (PVC), black

According to:

IBM Part. Nr. 7362211

Technical data:

Temperature range	in motion		-10 °C till +70 °C
Conductor resistance	max.	[Ohm/km]	63,0
Insulation resistance	min.	[MOhm/km]	20
Wave damping	5,0-16,0 MHz	[dB/km]	23,0
Test voltage	Core / Core	[KV] 5min.	5

Number of pairs and nominal cross section AWG Nr.

**Copper
figure
kg/km**

**Overall
diameter
appr.mm**

**Weight
appr.
kg / km**

1 x 2 x AWG 20/7	51	8,0	98
------------------	----	-----	----