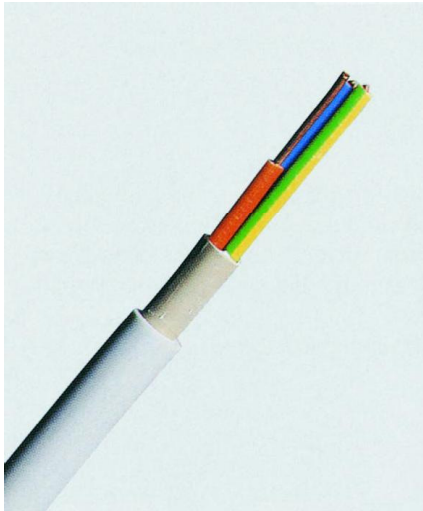



Construction

Solid or stranded copper conductor, core insulation of PVC, cores are stranded, common core covering, PVC outer sheath.

Application

For installations on, in or under plastering in dry or humid locations, as well as in the open-air. Not suitable for laying directly in earth.

Temperature range

- 5°C till + 70°C

Number of cores and nominal cross section mm²	Price		Copper figure kg / km	Cond. construction (approx. value) mm	Overall diameter ca. mm	Weight ca. kg / km
	EUR / km					
NYM 300/500 V	J	O				
2 x 1,5		703,46	30	1 x 1,38	8,7	115
2 x 2,5		1.079,11	50	1 x 1,78	9,9	166
2 x 4		1.257,63	80	1 x 2,25	10,8	232
3 x 1,5	577,22	751,69	45	1 x 1,38	8,9	135
3 x 2,5	1.034,11	1.238,65	75	1 x 1,78	10,4	190
3 x 4	1.740,56	2.049,10	120	1 x 2,25	11,5	265
3 x 6	2.358,95		180	1 x 2,76	13,0	360
3 x 10 RE	3.778,67		300	1 x 3,56	16,0	570
4 x 1,5	738,22	926,25	60	1 x 1,38	9,6	160
4 x 2,5	1.426,45	1.646,01	100	1 x 1,78	11,2	230
4 x 4	1.960,73	2.255,58	160	1 x 2,25	13,2	330
4 x 6	2.469,15	2.821,89	240	1 x 2,76	14,8	490
4 x 10 RE	3.754,43	3.780,75	400	1 x 3,56	17,8	690
4 x 10 RM	4.215,61	4.202,52	400	7 x 1,35	18,0	700
4 x 16 RM	6.127,07	6.535,52	640	7 x 1,70	21,8	1080
5 x 1,5	879,48		75	1 x 1,38	10,3	190
5 x 2,5	1.574,62		125	1 x 1,78	12,1	270
5 x 4	2.340,52		200	1 x 2,25	14,7	420
5 x 6	3.704,83		300	1 x 2,76	16,1	550
5 x 10 RE	5.083,27		500	1 x 3,56	19,3	860
5 x 10 RM	5.653,74		500	7 x 1,35	20,0	880
5 x 16 RM	8.034,65		800	7 x 1,70	24,2	1340
7 x 1,5	1.961,25	2.300,06	105	1 x 1,38	11,3	240
10 x 1,5	3.332,78		150	1 x 1,38	14,7	330
12 x 1,5	3.881,70		180	1 x 1,38	16,0	365
7 x 2,5	3.256,45	3.582,18	175	1 x 1,78	14,5	324