


H05RR-F (GML)

Rubber Sheathed Cable for Weak Mechanical Stress

according to DIN VDE 0282-4 / ÖVE - K40-4

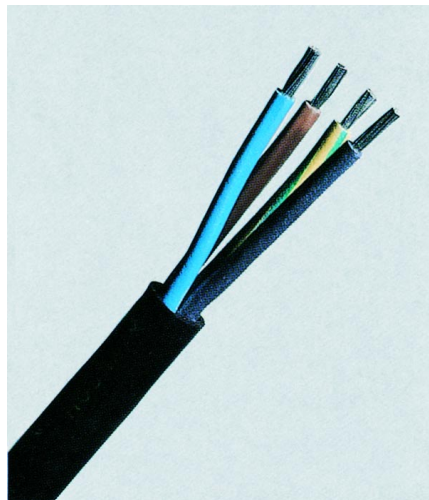

Construction

Fine-stranded tinned or bare copper conductor, core insulation of rubber, cores are stranded, outer sheath of ordinary ethylene propylene rubber (NR), black.

Application

For general use in dry locations for connections of electrical apparatus submitted to weak mechanical strength, like vacuum cleaner, kitchen appliance, etc. Unsuitable for industrial and agricultural use.

Temperature range

- 20°C till + 60°C

Core number and nominal cross section mm ²	Price EUR / km	Copper figure kg / km	Cond. construction (approx. value) mm	Overall diameter ca. mm	Weight ca. kg / km
H05RR-F 300/500 V					
2 x 0,75	733,48	15,0	24 x 0,21	6,2	61
2 x 1	906,98	20,0	32 x 0,21	6,8	73
2 x 1,5	1.041,06	30,0	30 x 0,26	8,2	115
2 x 2,5	1.766,79	50,0	50 x 0,26	9,5	160
H05RR-F 300/500 V					
3 G 0,75	918,51	22,5	24 x 0,21	6,8	75
3 G 1	1.114,08	30,0	32 x 0,21	7,2	86
3 G 1,5	1.344,25	45,0	30 x 0,26	8,7	135
3 G 2,5	2.006,17	75,0	50 x 0,26	10,4	190
4 G 0,75	1.293,93	30,0	24 x 0,21	7,4	91
4 G 1	1.529,95	40,0	32 x 0,21	7,9	105
4 G 1,5	1.748,51	60,0	30 x 0,26	9,7	165
4 G 2,5	2.530,96	100,0	50 x 0,26	11,6	235
5 G 0,75	1.592,24	37,5	24 x 0,21	9,5	100
5 G 1,5	2.158,49	75,0	30 x 0,26	10,6	190
5 G 2,5	3.126,66	125,0	50 x 0,26	12,9	285