


XYMM K35

PVC Building Site Cable

adapted to ÖVE-K41

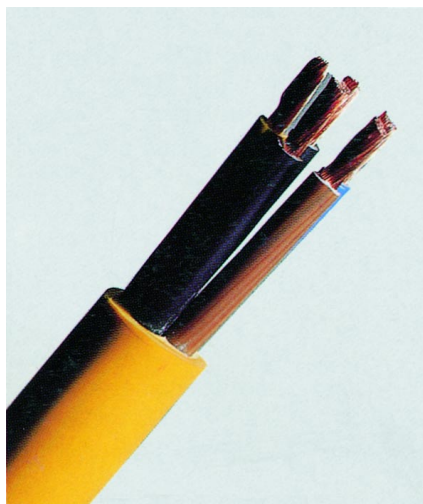

Construction

Fine-stranded copper conductors, core insulation of cold-resistant PVC, cores are stranded, outer sheath of PVC, which is flexible to cold temperatures.

Application

This cable is suitable for connecting electrical equipment particularly on building sites. It is used in dry and damp locations, outdoors and in areas with explosion hazard.

Temperature range

In motion - 35°C till + 70°C

For fixed installation - 40°C till + 70°C

Number of cores and nominal cross section mm ²	Price EUR / km	Copper figure kg / km	Cond. construction (approx. value) mm	Overall diameter ca. mm	Weight ca. kg / km
XYMM-J 450/750 V K35					
3 x 1,5	1.157,72	1.080,70	45	30 x 0,26	9,7
3 x 2,5	2.336,04	2.180,70	75	50 x 0,26	11,5
3 x 4	3.466,83	3.236,40	120	56 x 0,31	13,3
4 x 1,5	1.478,05	1.380,20	60	30 x 0,26	10,7
4 x 2,5	2.834,56	2.645,80	100	50 x 0,26	12,5
4 x 4	4.378,53	4.087,90	160	56 x 0,31	14,5
4 x 6	6.894,82	6.437,00	240	84 x 0,31	17,0
4 x 10	10.343,26	9.655,60	400	80 x 0,41	22,3
4 x 16	15.126,58	14.120,70	640	128 x 0,41	25,5
5 x 1,5	1.939,49	1.810,50	75	30 x 0,26	11,6
5 x 2,5	3.569,98	3.332,90	125	50 x 0,26	13,6
5 x 4	5.660,88	5.284,30	200	56 x 0,31	16,0
5 x 6	8.319,31	7.766,60	300	84 x 0,31	19,0
5 x 10	12.109,71	11.305,00	500	80 x 0,41	24,7
5 x 16	17.308,12	16.157,50	800	128 x 0,41	28,3