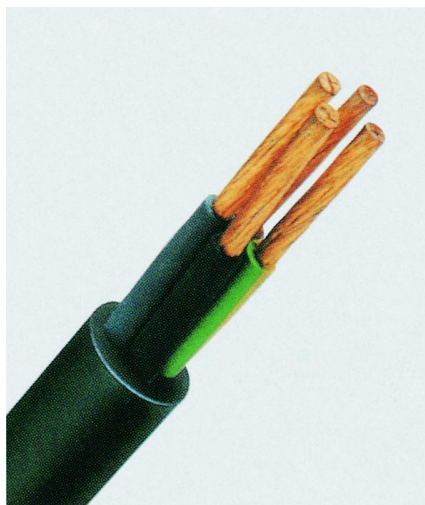


**Construction**

Fine-stranded bare copper conductor, cores are insulated with PVC and stranded, reinforced outer sheath of PVC, black or light grey (RAL 7035).

Application

For strong mechanical stress in dry and humid locations as well as outdoors.

Temperature range

- 5°C till + 70°C

Core number and nom. cross section mm ²	Colours	Price EUR / km	Copper figure kg / km	Cond. construction (approx. value) mm	Overall diameter ca. mm	Weight ca. kg / km
YMS 450/750 V		J	O			
2 x 1,5	bla		1.081,48	30	30 x 0,26	109
3 x 1,5	bla	1.335,33	1.468,81	45	30 x 0,26	150
3 x 2,5	bla	1.703,24	1.873,39	75	50 x 0,26	210
4 x 1,5	bla	1.560,65	1.716,54	60	30 x 0,26	180
4 x 2,5	bla	2.101,63	2.311,57	100	50 x 0,26	250
4 x 4	bla	3.157,73	3.473,58	160	56 x 0,31	350
4 x 6	bla	4.475,37	4.922,81	240	84 x 0,31	470
4 x 10	bla	6.712,90	7.384,11	400	80 x 0,41	750
4 x 16	bla	9.817,52	10.799,29	640	128 x 0,41	1150
5 x 1,5	bla	2.000,25	2.200,22	75	30 x 0,26	210
5 x 2,5	bla	2.850,62	3.135,53	125	50 x 0,26	300
5 x 4	bla/lgr	4.106,98	4.517,68	200	56 x 0,31	430
5 x 6	bla/lgr	5.362,52	5.898,72	300	84 x 0,31	580
5 x 10	bla/lgr	9.385,02	10.323,41	500	80 x 0,41	900
5 x 16	bla	13.413,02	14.754,32	800	128 x 0,41	1340