


Datasheet A-2Y(L)2Y

Version 1/2009

Plastic Insulated Telecommunication Cable for Local Networks

Application:

They are suitable for the installation into the earth, in conduits, cable ducts and are used as network cables in industrial and operational plants, mainly in low-frequency installations.

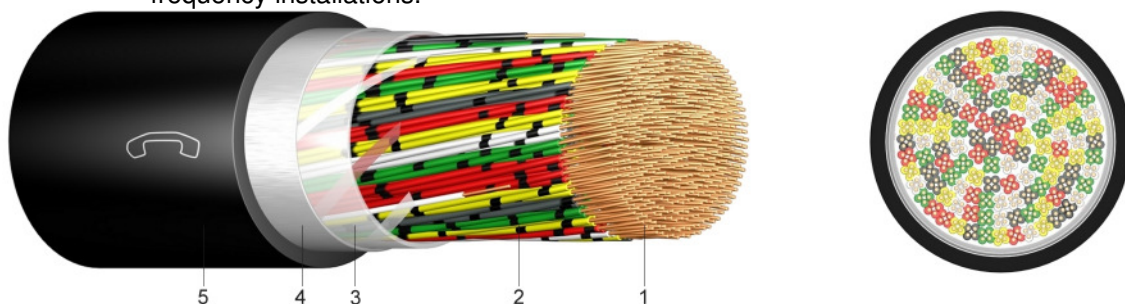

Construction:

- 1 solid bare copper, Ø 0,6/0,8mm
- 2 core insulation of polyethylene (PE)
- 3 layer of plastic foil
- 4 static screen of plastic laminated aluminium tape
- 5 outer sheath of polyethylene (PE), black

Information:

conductor loop resistance:
 core-Ø 0,6mm 130,0 Ohm/km
 core-Ø 0,8mm 73,2 Ohm/km
 Cores twisted to star-quads.

According to:

DIN VDE 0816 (core identification)
 DIN EN 60228 class 1 (construction)

Technical data:

Peak operating voltage		[V]	225 Volt
Test voltage at 50 Hz	core / core	[V] _{AC}	500
	core / screen	[V] _{AC}	2000
Temperature range	in motion		-20 °C till +50 °C
	fixed		-20 °C till +70 °C
Bending radius	in motion	x diameter	15
Insulation resistance	min.	[MΩ/km]	5000
Mutal capacitance	max.	[nF/km]	52
Capacitance unbalance 100m	max	[pF]	800

Number of pairs and nominal conductor diameter mm	Copper figure kg/km	Insulation thickness mm	Overall diameter appr. mm	Weight appr. kg / km
2 x 2 x 0,6	13	1,8	8,1	63
6 x 2 x 0,6	36	1,8	9,3	86
10 x 2 x 0,6	59	1,8	11,5	146
20 x 2 x 0,6	115	1,8	15,2	239
40 x 2 x 0,6	228	1,8	18,0	391
50 x 2 x 0,6	285	1,8	19,4	469
100 x 2 x 0,6	568	2,0	27,9	878
2 x 2 x 0,8	22	1,8	8,6	74
6 x 2 x 0,8	62	1,8	11,3	141
10 x 2 x 0,8	103	1,8	13,2	203
20 x 2 x 0,8	203	1,8	17,3	346
40 x 2 x 0,8	404	2,0	20,7	590
50 x 2 x 0,8	505	2,0	22,5	715