


NSGAFöu (GHuöf)

Special Rubber Single Core Cable

according to DIN VDE 0250-602 / ÖVE - K40-52

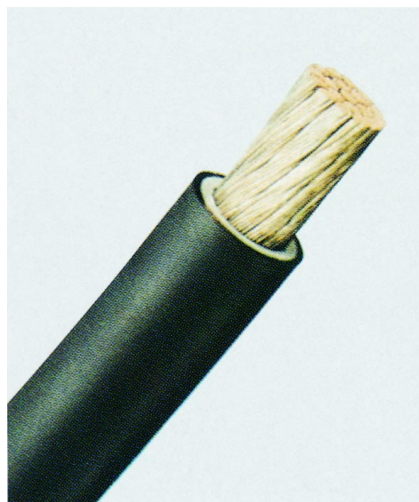

Construction

Fine-stranded tinned copper conductor, EPR rubber insulation, outer sheath of polychloroprene, black, abrasion and oil resistant, flame retardant.

Application

This cable is suitable for track-bound vehicles and trackless trolley buses as well as for installations in dry locations, in switchboards and distributors up to 1.000 V as a short circuit and earth fault proof cable.

Temperature range

- 25°C till + 80°C

Admissible conductor temperature + 90°C

nominal cross section	Price	Copper figure	Cond. construction	Overall diameter	Weight
mm ²	EUR / km	kg / km	(approx. value) mm	ca. mm	ca. kg / km
NSGAFöu 1,8/3 KV					
1,5	1.101,40	15	30 x 0,26	6,1	60
2,5	1.315,03	25	50 x 0,26	6,6	75
4	1.692,93	40	56 x 0,31	7,0	90
6	1.984,11	60	84 x 0,31	7,5	120
10	3.089,53	100	80 x 0,41	9,9	180
16	4.234,97	160	126 x 0,41	10,9	250
25	5.874,60	250	196 x 0,41	13,1	380
35	7.569,07	350	276 x 0,41	15,0	480
50	10.122,51	500	396 x 0,41	16,0	620
70	13.142,71	700	360 x 0,51	18,0	870
95	16.745,11	950	475 x 0,51	20,3	1180
120	20.199,94	1200	608 x 0,51	22,5	1420
150	24.278,70	1500	756 x 0,51	25,0	1750
185	29.265,44	1850	925 x 0,51	27,5	2150
240	37.099,64	2400	1221 x 0,51	32,1	2800
300	45.489,89	3000	1530 x 0,51	34,0	3090

NSGAFöu 0,6/1 KV

price and delivery time as well as technical details on request

NSGAFöu 3,6/6 KV

price and delivery time as well as technical details on request