


N2XS2Y (E-2XHC2Y)
NA2XS2Y (E-A2XHC2Y)

XLPE Insulated Single-Core Cable with PE Outer Sheath

according to DIN VDE 0276-620 / ÖVE - K620

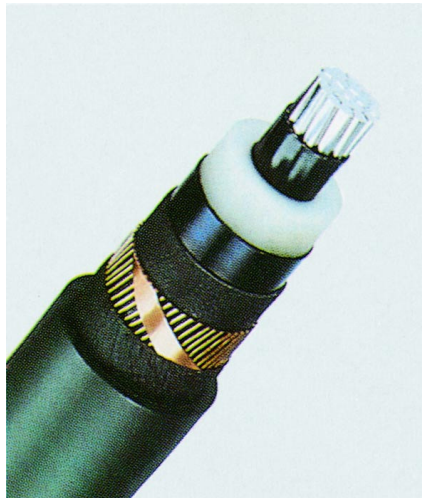

Construction

Conductor of stranded bare copper or aluminium wires, inner layer of semi-conducting material, insulation of cross-linked polyethylene (XLPE), outer layer of semi-conducting material, conducting tape, copper wires and copper tape applied helically, separator tape, black polyethylene outer sheath with normalised marking and meter marking.

Application

To be laid directly in ground, outdoors, indoors and in cable ducts.

Temperature range

- 20°C till + 80°C

Admissible conductor temperature + 90°C

Admissible short circuit temperature + 250°C

(for the duration of max. 5 s)

Number of cores and nominal cross section	Price	Aluminium figure	Copper figure	Overall diameter		Weight	Current carrying *	
				min. value	max. value		ca. ground	air
mm²	EUR / km	kg / km	kg / km	ca. mm		kg / km	A	
N2XS2Y 6/10 KV								
1 x 35 RM / 16	6.821,30	--	540	23	28	800	187	195
1 x 50 RM / 16	7.466,40	--	690	24	29	950	220	234
1 x 70 RM / 16	8.693,30	--	890	26	31	1150	269	292
1 x 95 RM / 16	10.275,60	--	1140	27	32	1450	321	354
1 x 120 RM / 16	12.191,00	--	1390	29	34	1700	364	407
1 x 150 RM / 25	14.327,30	--	1795	30	35	2050	405	460
1 x 185 RM / 25	16.618,00	--	2145	32	37	2450	457	527
1 x 240 RM / 25	20.078,80	--	2695	34	39	3000	528	621
1 x 300 RM / 25	23.773,80	--	3295	36	40	3600	593	709
1 x 400 RM / 35	30.497,60	--	4410	40	45	4500	665	815
1 x 500 RM / 35	38.779,70	--	5410	43	48	5550	739	921
NA2XS2Y 6/10 KV								
1 x 35 RM / 16	6.535,10	103	190	23	28	600	144	151
1 x 50 RM / 16	7.093,70	147	190	24	29	650	171	181
1 x 70 RM / 16	8.000,00	206	190	26	31	750	209	226
1 x 95 RM / 16	9.074,20	279	190	27	32	850	249	275
1 x 120 RM / 16	10.251,70	353	190	29	34	950	283	317
1 x 150 RM / 25	11.593,50	441	295	30	35	1150	316	359
1 x 185 RM / 25	13.072,90	544	295	32	37	1300	358	412
1 x 240 RM / 25	15.230,00	706	295	34	39	1500	416	489
1 x 300 RM / 25	17.480,50	882	295	36	40	1700	469	559
1 x 400 RM / 35	22.217,10	1176	410	40	45	2100	532	651

* trefoil touching arrangement

Number of cores and nominal cross section	Price	Aluminium figure	Copper figure	Overall diameter		Weight	Current carrying *	
				min. value	max. value		capacity ground	air
mm²	EUR / km	kg / km	kg / km	ca. mm		ca. kg / km	A	
N2XS2Y 12/20 KV								
1 x 35 RM / 16	10.451,80	--	540	27	32	950	189	199
1 x 50 RM / 16	11.295,90	--	690	28	33	1100	223	238
1 x 70 RM / 16	12.801,40	--	890	30	35	1350	273	296
1 x 95 RM / 16	14.771,10	--	1140	31	36	1650	325	358
1 x 120 RM / 16	17.048,70	--	1390	33	38	1900	368	412
1 x 150 RM / 25	19.464,40	--	1795	34	39	2300	410	466
1 x 185 RM / 25	22.259,20	--	2145	36	41	2650	463	532
1 x 240 RM / 25	25.295,30	--	2695	39	44	3250	534	627
1 x 300 RM / 25	28.818,90	--	3295	41	46	3850	601	715
1 x 400 RM / 35	34.119,20	--	4410	44	49	4750	674	819
1 x 500 RM / 35	45.180,50	--	5410	47	52	5850	750	927
NA2XS2Y 12/20 KV								
1 x 50 RM / 16	9.738,00	147	190	28	33	800	173	184
1 x 70 RM / 16	10.443,00	206	190	30	35	900	211	229
1 x 95 RM / 16	11.411,00	279	190	31	36	1050	252	278
1 x 120 RM / 16	12.530,20	353	190	33	38	1150	287	320
1 x 150 RM / 25	13.935,00	441	295	34	39	1350	320	363
1 x 185 RM / 25	15.660,70	544	295	36	41	1500	362	415
1 x 240 RM / 25	17.723,60	706	295	39	44	1700	421	493
1 x 300 RM / 25	20.410,50	882	295	41	46	1950	474	563
1 x 400 RM / 35	26.059,30	1176	410	44	49	2350	538	652
N2XS2Y 18/30 KV								
1 x 50 RM / 16	15.867,50	--	690	33	38	1350	226	241
1 x 70 RM / 16	17.248,70	--	890	35	40	1550	276	299
1 x 95 RM / 16	18.983,80	--	1140	36	41	1900	329	362
1 x 120 RM / 16	20.903,50	--	1390	38	43	2150	373	416
1 x 150 RM / 25	23.148,70	--	1795	39	44	2550	415	469
1 x 185 RM / 25	25.879,40	--	2145	41	46	2950	468	536
1 x 240 RM / 25	29.060,00	--	2695	43	48	3500	541	630
1 x 300 RM / 25	32.544,60	--	3295	46	51	4150	608	717
1 x 400 RM / 35	37.586,20	--	4410	49	54	5050	684	823
1 x 500 RM / 35	50.363,50	--	5410	52	57	6200	762	929
NA2XS2Y 18/30 KV								
1 x 50 RM / 16	13.858,10	147	190	33	38	1050	175	187
1 x 70 RM / 16	14.472,50	206	190	35	40	1150	214	232
1 x 95 RM / 16	15.516,00	279	190	36	41	1250	256	281
1 x 120 RM / 16	16.805,00	353	190	38	43	1400	290	323
1 x 150 RM / 25	18.278,10	441	295	39	44	1600	324	365
1 x 185 RM / 25	19.998,50	544	295	41	46	1750	366	418
1 x 240 RM / 25	21.866,30	706	295	43	48	2000	426	494
1 x 300 RM / 25	23.836,10	882	295	46	51	2250	479	564
1 x 400 RM / 35	26.511,20	1176	410	49	54	2700	545	654

* trefoil touching arrangement